

BEAM FLEXURAL STRENGTH ENHANCEMENT WITH BASALT POLYMER REBAR

V.Antony Francis ¹, S.Aswin kumar ²

Department of Civil Engineering, Agni College of Engineering of Technology, Chennai.

Abstract : Basalt fiber reinforced polymer (BFRP) is a new material, which is used in construction as an alternative material to steel rebar. This paper reviews the experimental investigation carried out to evaluate the performance characteristics basalt polymer rebar in concrete beams. The beams were tested of M30 Grade concrete and reinforced with basalt rebar. Totally 3 beams were casted basalt fiber reinforced polymer provided as a reinforcement. Tests are made to find the flexural capacity of the beam. Load deflection curve were plotted.

Keywords : GFRP Basalt, Fiber, Deflection

I. INTRODUCTION

Fiber materials are being involved effectively in construction field. It is one of the main developments which have occurred in the composites polymer industry in the recent years made from basalt rock which is currently available for making Basalt fiber polymer rod. Basalt fiber can be extruded from molten basalt rock at in a single stage process. The fiber production process is like the process used for the production of glass fiber. Basalt bars have various advantages compared with that of normal steel and other composites used as reinforcement. The characteristics of BFRP are: (1) mechanical properties (a) High tensile strength (b) Young's modulus. (2) Chemically inert, acidic, alkaline states. (3) High thermal stability - effective in insulating, electrical and sound properties (4) less weight and reduced self-weight characteristics. (5) Low elastic - moduli when compared to other fiber composites and conventional steel. (Values provided based on various literature studies, the exact values are decided only by the manufacturer based on quality of materials involved in manufacturing) where, BFRP bar is 4 times lighter weight than steel reinforcement weight with equal strength characteristics, which significantly reduces transportation costs for shipping, loading and unloading, as well as operating expenses at the construction site.

II. MATERIAL

Cement

Cement in concrete acts as a binding material that hardens after the addition of water. It plays an important role in construction sector. In this study the Ordinary Portland Cement (OPC) of 53 grades is used. Various tests were performed on cement they are: Soundness test, Consistency test, Initial and Final setting time.

Fine Aggregate

Locally available river sand of specific gravity 2.65, fineness modulus 2.7, and conforming to Zone II was used as fine aggregate. The crushed granite stone with a maximum size of 20mm, and specific gravity 2.75 was used as coarse aggregate

Water:

Water is used for both mixing and curing of the slab specimen as per the guidelines of IS: 456:2000 & IS: 3025-1964 PART 22

Basalt Fiber

8mm dia basalt fiber rod used for the basalt Rod Beam

III. EXPERIMENTAL ANALYSIS

The beams were tested of M30 Grade concrete and reinforced with basalt rebar. 1000mm x 150 mm x 200 mm beam with 8mm basalt fiber bar as reinforcement. Casting is a manufacturing process in which a flowable material is usually poured into a mould, which contains a hollow cavity of the desired shape, and then allowed to solidify.

Curing is done to retard or reduce the evaporation of moisture from concrete. Curing is done for 28 days. The size of the specimen going to be casted are 1 m length. The Beam and samples are tested on 1. Compressive Strength Test, 2. Flexural Strength

Table -1: Compressive Strength N/mm²

Trail	Compressive Strength N/mm ²
1	37.60
2	37.20
3	37.40

Table -2: Loading Results


Bea m Serie s	Cracking Load (kN)	Ultimate Load (kN)
Basalt	30	138

Table -3: Loading-Deflection Behavior

Load	Deflection (mm)
	Basalt Rod Beam
0	0
10	0.15

20	0.28
30	0.88
40	1.43
50	2.45
60	3.11
70	4.59
80	5.75
90	6.48
100	7.27
110	8.16
120	8.90
130	9.78
138	10.48

Charts 1 : Deflection vs load graph

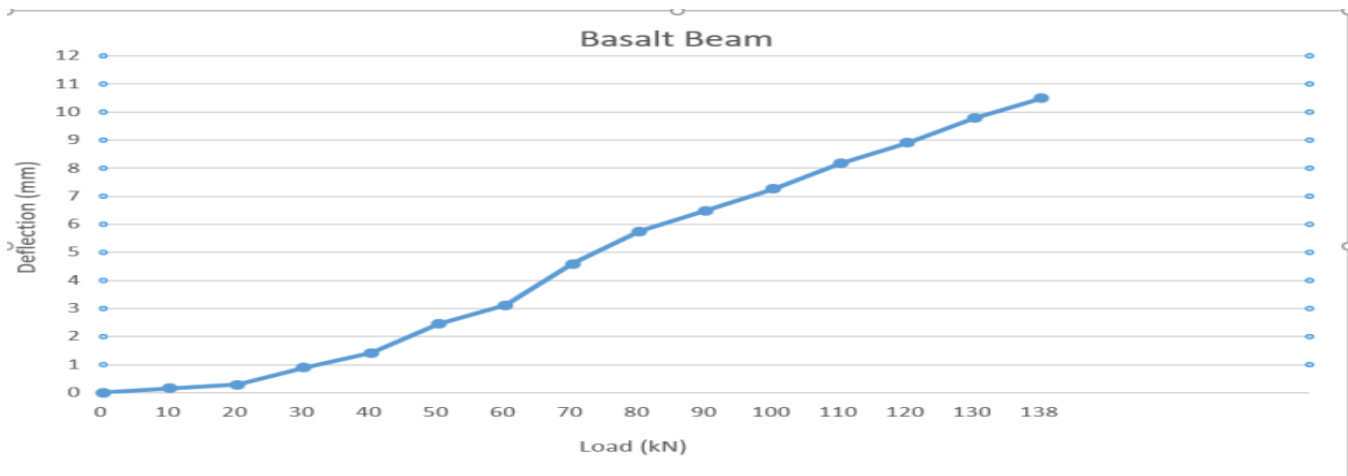

VI. CONCLUSION

Tests were conducted for of basalt fiber reinforced concrete beams and their flexural strength behavior and deflection behavior. It is observed that the beam specimens of M30 grade reinforced with basalt fiber bars carried a maximum load of 138Kn

References

- [1] Fareed Elgabbas, Patrick Vincent, Ehab A. Ahmed and Brahim Benmokrane (2016) *Experimental testing of basalt-fiber- reinforced polymer bars in concrete beams Composites Part B 91 (2016) 205e218*
- [2] Gorde Pravin Jaysing and Deepa A. Joshi (2013) *Review on Application of Basalt Fiber in Civil Engineering ISSN 2278 – 2540*
- [3] Hannibal Ólafsson and Eypór Þórhallsson (2009) *Basalt fiber bar Reinforcement of concrete structures*
- [4] Jibin C Sunny and Preetha Prabhakaran (2016) *Experimental study on properties of concrete*

reinforced with basalt bars IRJET e- ISSN:2395-0056

- [5] Marek Urbanski, Andrzej Lapko and Andrzej Garbacz (2013) *Investigation on Concrete Beams Reinforced with Basalt Rebars as an Effective Alternative of Conventional R/C Structures* doi:10.1016/j.proeng.2013.04.149
- [6] S.Ramamoorthy, k. Muthuramu and I.K. Rex (2018) *Flexural Behaviour of Concrete Slab Reinforced Withbasalt and Steel Rebars* ISSN (e): 2250-3021, ISSN (p): 2278-8719 PP 53-59
- [7] M. P. Sureshkumar, S.Ramesh, P.Easwaran and P. Pruthivraj (2016) *Basalt fiber application in concrete – a review* ISSN: 2455- 9288
- [8] Patil Dinanjali S and Ogale Ramesh A (2017) *Performance Evaluation of Basalt Fiber Concrete.* IRJET e-ISSN:2395-0056.
- [9] V. Pavalan and R. Sivagamasundari (2017) *An experimental contribution on the tensile performance of basalt fibre reinforced polymer bars* IJCIET_08_06_061
- [10] PouyaBanibayat and Anil Patnaik (2015) *Creep Rupture Performance of BasaltFiber-Reinforced Polymer Bars* J. Aerosp. Eng., 2015, 28(3): 04014074
- [11] V. Pavalan and R. Sivagamasundari (2018) *Physical and Mechanical Properties of Basalt Fibre Reinforced Polymer Bars* AIJRSTEM 18-317
- [12] TehminaAyub, Nasir Shafiq, and M. Fadhil Nuruddin (2014) *Effect of Chopped Basalt Fibers on the Mechanical Properties and Microstructure of High-Performance Fiber Reinforced Concrete* <http://dx.doi.org/10.1155/2014/587686>